




Cylinder Block O-Ringing Tool

You will discover this tool to be both an exceptional time-saver and money-maker. The amazing versatility of the "ISKY" Groov-O-Matic permits Block O-Ring grooving to be done anywhere, in the shop or in the field, in only a matter of minutes.

The tool pilots in the cylinder bore & is easily adjustable for bore diameter. Also adjustable for both diameter and depth of cut for the copper O-ring groove. This tool will undoubtedly become standard equipment for every efficiently run speed shop. (Copper wire and complete instructions furnished with tool).

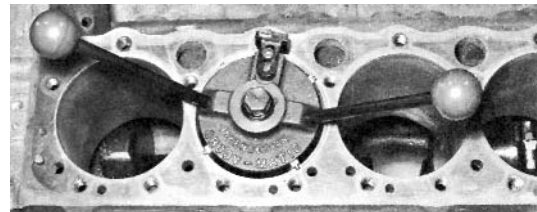

- Groov-O-Matic is the fast and profitable way to "O-Ring" the cylinder block face.
- Groov-O-Matic alleviates blown head gaskets on supercharged, turbocharged or hi-compression engines.

Part No.	Type & Bore Range
100-GRM	"Sport Compact" Mini Groov-O-Matic (with copper wire and complete instructions) 3 1/8 - 3 3/4 Cylinder Bores
200-GRM	Full-Size "V8" Groov-O-Matic (with copper wire and complete instructions) 3 3/4 - 4 3/8 Cylinder Bores

Rental Charge \$60.00 (Tool must be purchased at your normal discount and upon return of the tool in good working order, the purchase price is refunded less the \$60.00 rental fee.)

Groov-O-Matic Replacement Parts:

Cobalt Cutting Blades	Net ea. \$16.00
Aluminum Guide Bars (Standard Bores) up to 4-3/8"	Net ea. \$7.50 (200-GRM only)
Set of 4 Special Extension Guide Bars to fit bores up to 4.650"	Net \$30.00 (200-GRM only)
Copper Wire (1 lb. spool/approx. 300 ft.)	Net \$30.00